

The radio YAESU...


The New Premium HF/50MHz Transceiver FT DX 5000 Series

Dynamic Range 112 dB/IP3 +40 dBm





Two Totally Independent Receivers - The VFO-A/Main Receiver utilizes Super Sharp Roofing filters to give you the highest performance and best flexibility

The tight shape factor 6 pole crystal filters and D Quad Double Balanced Mixer design afford incredible improvement in the 3rd-Order dynamic range and IP3 performance



Superb 3rd-Order Dynamic Range and 3rd-Order Intercept Point (IP3)

You will be pleased with the astounding 112 dB dynamic range and superb IP3 + 40dBm at 10 kHz separation (CW/500 Hz BW). Experience the unmatched close-in dynamic range of 105 dB, IP3 +36 dBm at 2 kHz separation (CW/500 Hz BW)! (VFO-A/Main Receiver, 14 MHz, IPO-1)

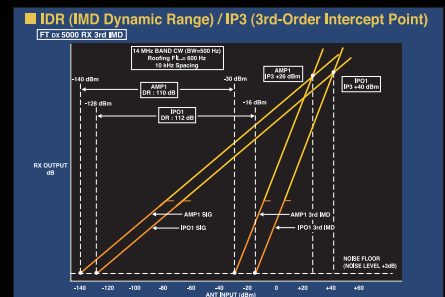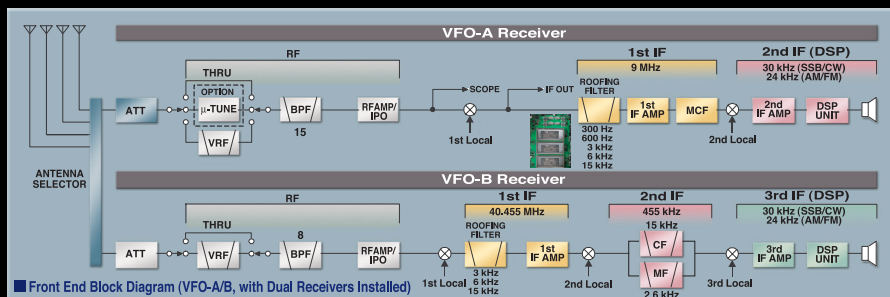

**HF/50 MHz 200 W Transceiver NEW
FT DX 5000MP**

Station Monitor SM-5000 included
± 0.05ppm OCXO included
300 Hz Roofing Filter included

**HF/50 MHz 200 W Transceiver NEW
FT DX 5000D**

Station Monitor SM-5000 included
± 0.5ppm TCXO included
300 Hz Roofing Filter optional

**HF/50 MHz 200 W Transceiver NEW
FT DX 5000**

Station Monitor SM-5000 optional
± 0.5ppm TCXO included
300 Hz Roofing Filter optional



Vertex Standard
US Headquarters
10900 Walker Street
Cypress, CA 90630 (714)827-7600

The FCC has already T/A granted acceptance so we do not need the below statement. The FTdx5000 Series has not been approved by the FCC. The device may not be sold or leased, or offered for sale or lease, until FCC approval has been obtained.

For the latest Yaesu news, visit us on the Internet:
<http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.